



Light control function

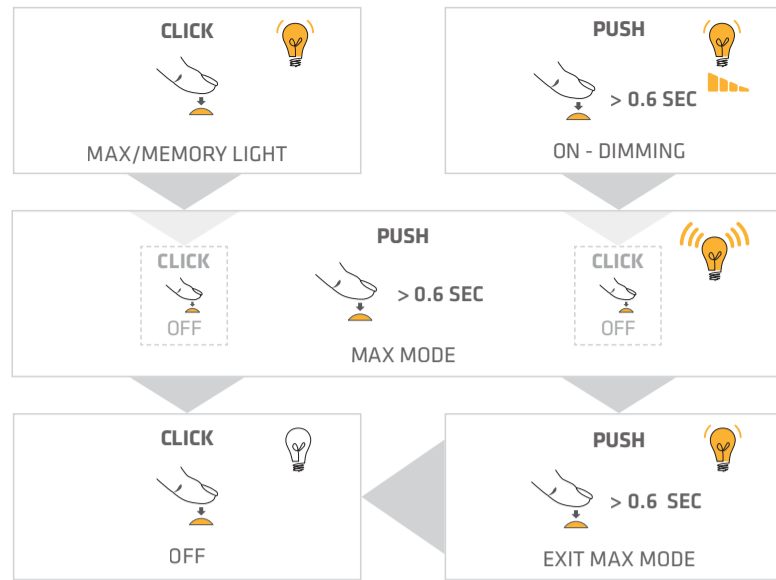


Charging (0°C - +45°C)

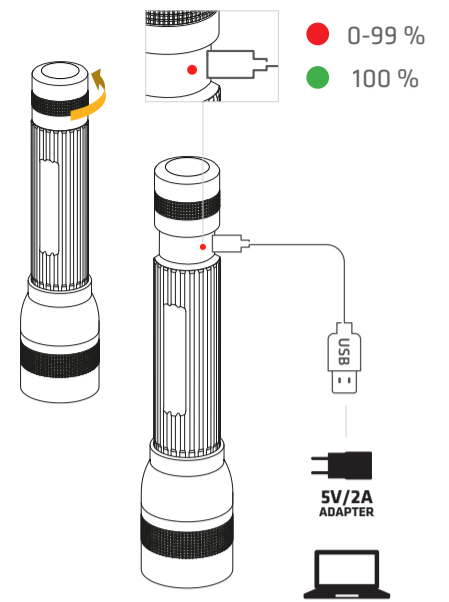

Additional online information



Hyperfocus

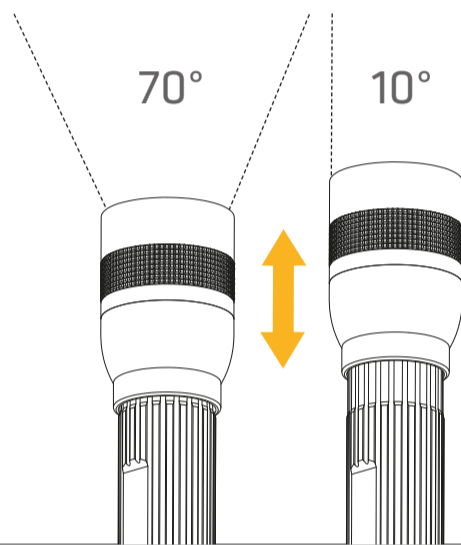

Warning



Specifications

Li-Po	175 m
10° - 70°	67 g
-20°C - +50°C	IP X4

CE

This manual may contain typographical errors. Data and information are subject to change without notice.

Steiner A/S
Dyssen 3
DK-8200 Aarhus N
Phone: +45 87 52 52 12
Fax: +45 87 52 52 15
info@suprabeam.com
www.suprabeam.com

OTHER SELECTED PRODUCTS FROM THE SUPRABEAM RANGE



