

Q4_{xr}



PACKAGING



800 LUMENS

SPECIFICATIONS

Li-Ion
2200 mAh

250 m

132 g

10° - 70°

WHAT'S IN THE BOX

TORCH



POUCH



STRAP



ADAPTER



CHARGER




USB-CABLE



BATTERIES



MANUAL



UNIQUE SELLING POINTS (USP)

SLIDING HYPERFOCUS™

The sliding Hyperfocus™ optical system collects the LED radiance and distributes it with maximum efficiency from a perfect round floodlight beam to a highly intensive, long range spot beam. All just by one-hand sliding of the head.


USB FAST CHARGING BASE

Connected by standard Micro USB and with our 5V/2A-230VAC power adapter it charges the Li-Ion cell at maximum rate. With or without USB power it shows the battery status on a 5-LED light stripe at any time.

SPARE BATTERY - 18650

With two 2200 mAh batteries included as a standard, you can charge one battery externally while using the other in the torch. This gives you the freedom to use the torch without interruption, and you won't have to worry about discontinuing the use of the torch to charge the battery.

LIGHT CURVE AND RUNTIMES

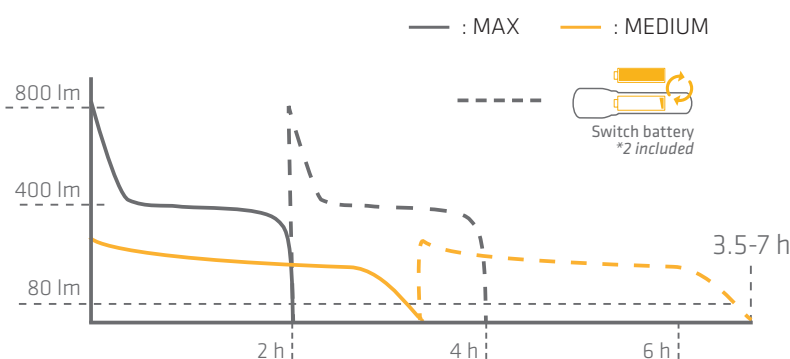

MAX

800 LUMENS
80

2 h

x2

HIGH

350 LUMENS
35

2 h | 15 min

x2

MEDIUM

200 LUMENS
20

3 h | 30 min

x2

LOW

50 LUMENS
5

24 h

x2

SPECIFICATIONS

LED / Focus configuration:	1 CREE Power Chip / Sliding Hyperfocus™
Case Material / Surface Treatment:	Anodized, High Strength Aluminium
Case Color:	Anthracite Dark Grey
Switch:	Quality Tested Metal Switch With Touch Function - Switch At Rear
Dimensions:	L: 134mm, ø: 32mm
Weight incl. battery:	132g
Ingress Protection Rating:	Splash Waterproof IPx4
Temperature:	-20°C to +35°C

ELECTRONICS

Built in Controller:	Yes, 5-step controller by press or touch
Standard Power Source:	Li-ion 18650 (2200 mAh) 2 pcs. included
Beam / Distance:	Variable from Spot to Floodlight / 250 Meters
Luminous Flux:	Max: 800 lm / High: 350 lm / Medium: 200 lm / Low: 50 lm / Strobe 10 Hz
Lighting Time:	Max: 2h / High: 2h 15min / Medium: 3h 30min / Low: 24h
Accessories included:	Pro. Quality Pouch with Velcro and Press Stud, Strap 100-240VAC Adaptor with USB cable and external ICR 18650 Charger

PACKAGING

Customs Tariff Number:	8513 1000
Packaging:	PE Portable Box with Space for Second Battery
Single Box Content / Size / Weight:	1 pcs, 25 x 21 x 7 cm / 975 g
Master Box Content / Size / Weight:	8 pcs, 40.5 x 41 x 27.5 cm / 6.5 kg
Order's Address:	info@suprabeam.com

FEATURES



INTELLIGENT LIGHT CONTROL (ILC)

Our intelligent light control lets you switch between different light outputs



COOLING CORE

The high strength aluminium cooperates with the "heatsink" to cool off the LED




TOUCH

Touch function enables you to toggle through the light levels swiftly, without having to fully activate the switch




WATER RESISTENT - IPX4

This IP-rating indicates that your product is water resistant



FOCUS LOCK

Improved Focus Lock-function to prevent unwanted sliding



SLIDING FOCUS

Focus from wide floodlight to narrow spot light with the one handed sliding focus



RECHARGEABLE

Rechargeable products will prevent you from using and throwing away alkaline batteries



EXTERNAL FAST CHARGING + SPARE BATTERY

Charge one battery externally while using the other in the torch



USB CHARGER

All of our rechargeable products are compatible with USB. This enables you to charge everywhere