


Q3_r

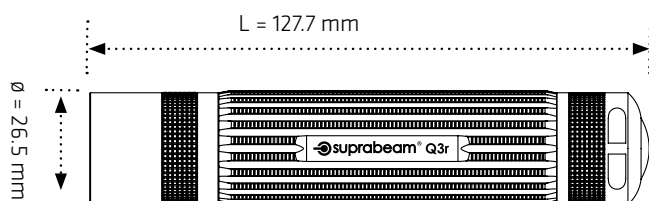

LED / Focus configuration:	1 CREE Power Chip / Sliding Hyperfocus™
Case Material / Surface Treatment:	Anodized, High Strength Aluminium
Case Color:	Anthracite Dark Grey
Switch:	Quality Tested Metal Touch-Switch At Rear
Dimensions:	L: 127.7mm, Ø: 26.5mm
Weight incl. battery:	139g
Ingress Protection Rating:	Splash Waterproof IPx4
Temperature:	-20°C to +50°C
Built in DC/DC Controller:	YES, 5-step controller by press or touch
Standard Power Source:	Li-ion 18650 (8.14 Wh) 2 pcs. included
Beam / Distance:	Variable from Spot to Floodlight / < 245 Meters
Luminous Flux:	BOOST: 400 lm / High: 250 lm / Medium: 50 / Low: 15 Lumen / Stroboskop 10 Hz
Lighting Time:	< 36 hours
Accessories included:	Pro. Quality Pouch with Velcro and Press Stud, Strap, 100-240VAC Adaptor with USB cable and external ICR 18650 Charger
Customs Tariff Number:	8513 1000
Packaging:	Presentation tube
Single Box Content / Size / Weight:	1 pcs, hight/diameter, 20 x 10.1 cm / 630 g
Master Box Content / Size / Weight:	24 pcs, 40 x 40 x 43 cm / 9.6 kg
Order's Adress:	sales@suprabeam.com

Barcode and part number, varies by language, contact Suprabeam for information.